

# PLYFAST™ ZAMAC NAILIN ANCHOR

## Product Data Sheet

**Product Name:** PLYFAST™ Zamac Nailin Ancho

**Product Description: Fastener:** Zinc alloy nail drive anchor in a one piece assembly was developed for its resistance to corrosion. A simple to use anchor fastens termination bar, wood, metal studs, siding and various other materials to concrete, masonry block and brick. Meets or exceeds FM 4470 corrosion standards and withstands 30 cycles of the Kesternich DIN 50018 SFW 2.0 test. **Head:** Mushroom style head.

**Pull-out Resistance:** Anchor body expands as it is driving into the substrate material. Has excellent tension load on pull-out resistance.

**Use:** PlyFast™ Zamac Nailin Anchor fastens termination bar, wood, metal studs, siding and various other materials to concrete, masonry block and brick.

**Approvals:** PlyFast™ Zamac Nailin Anchor is listed or approved with Factory Mutual (FM). Contact U.S. Ply, Inc. for specific/applicable codes.

**Fastening Pattern:** No layout or hole spotting required.

**Field Testing:** On-site withdrawal testing should always be performed to evaluate the ability of the roofing substrate to satisfactorily accept and retain fasteners. Such testing may alter fastener selection and modify applicable fastening patterns.

### INSTALLATION PROCEDURE:

Use an appropriate masonry bit to drill a pilot hole, the same nominal diameter as the anchor and slightly deeper than the desired penetration. Use hammer to nail the anchor into the hole. Anchor body will expand when driven wedging against the inner wall of the pilot hole.


### Standard Lengths:

Available lengths range from 3/16" x 7/8" to 1/4" x 2".

### Packaging:

100 PlyFast™ Zamac Nailin Anchors per carton.

500 PlyFast™ Zamac Nailin Anchors per master carton.

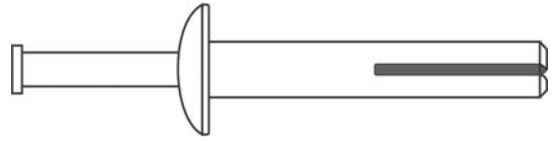

## ZAMAC NAILIN ANCHOR

**Limited Warranty:** U.S. Ply, Inc. warrants this product for one year from date of sale against defective workmanship and material, and its liability therefore shall be limited to replacing defective products reported defective during the warranty period. U.S. Ply, Inc. is not responsible for any failure attributable to improper use or installation in any manner inconsistent with manufacturer's specifications.

This limited warranty shall not apply if:

1. The integrity of the Anchor is damaged during installation or otherwise;
2. The System has not been properly installed and maintained;
3. The System components have not been installed and maintained to prevent corrosion and/or deterioration due to moisture or chemicals prior to, during, and after construction;
4. PLYFAST Products have been repaired or altered in any way inconsistent with published installation instructions.
5. There is any damage resulting from accident, acts of God, alteration, negligence, misuse or abuse;
6. Depreciation or deterioration of building materials and/or roofing system components other than PLYFAST Products are a factor in or have contributed to the loss of satisfactory holding ability of the PLYFAST Products; or
7. PLYFAST Products are not installed with good workmanship or not in accordance with the then current FM Approved or other approved Wind Uplift Design application pattern, specifications, and procedures or not in accordance with U.S.PLY's most current specifications for installation and maintenance of such System.

THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EXPRESS OR IMPLIED, ALL OF WHICH ARE EXPRESSLY DISCLAIMED INCLUDING ANY WARRANTY OF MERCHANTABILITY AND ANY WARRANTY OF FITNESS FOR PARTICULAR USE. This warranty provides specific legal rights and remedies which may vary from state to state.

**U.S. PLY, INC.**

A DANNY ADAIR COMPANY

Corporate Headquarters: P.O. Box 11740, Fort Worth, Texas 76110

TOLL-FREE: 877-62USPLY (877) 628-7759 • Local: (817) 413-0103 • Fax: (817) 413-8221

Website: [www.usply.com](http://www.usply.com) • Email: [sales@usply.com](mailto:sales@usply.com)