




# Ply MB Standard

ORDER / SPECIFICATION FORM

(For Built Up or Modified Roofs)

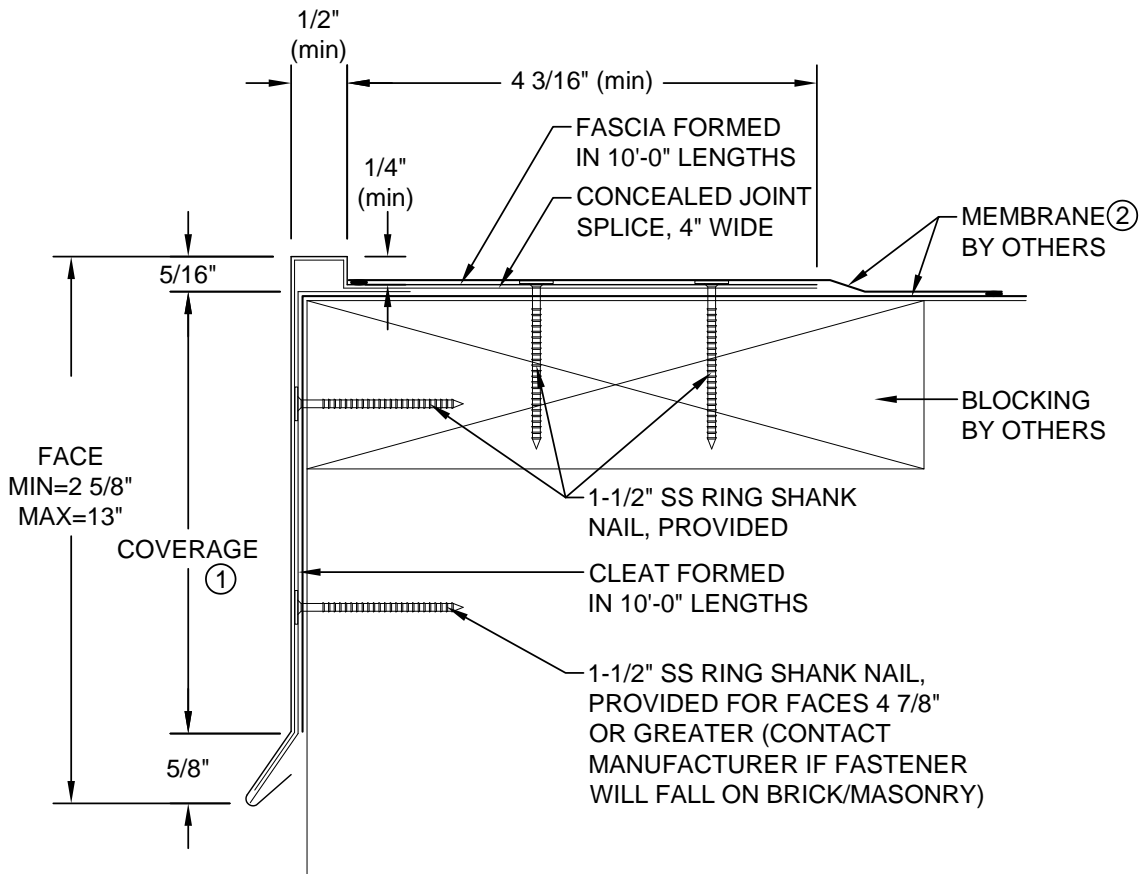



- ① Face = Coverage (should extend a min. of 1" below water resistant wall surface)+15/16".
- ② Coordinate installation with membrane manufacturer.

QUANTITY	MATERIAL	THICKNESS	ACCESSORY TYPE	FINISH
_____ Total LF (10'-0" pcs)	<input type="checkbox"/> Aluminum	<input type="checkbox"/> 0.040	<input type="checkbox"/> Welded	<input type="checkbox"/> Mill Finish
_____ Miters (___ Outside, ___ Inside)	<input type="checkbox"/> Galvanized	<input type="checkbox"/> 0.050	<input type="checkbox"/> Folded	<input type="checkbox"/> Prefinished Kynar
_____ End Caps (___ Left, ___ Right)	<input type="checkbox"/> Stainless Steel	<input type="checkbox"/> 0.063	<u>MODEL</u>	<input type="checkbox"/> Post Finished Kynar
_____ End Terms (___ Left, ___ Right)	<input type="checkbox"/> _____	<input type="checkbox"/> 24GA	<input type="checkbox"/> MBED-B350	<input type="checkbox"/> Prefinished Anodize
_____ Sumps		<input type="checkbox"/> 22GA	<input type="checkbox"/> MBED-B500	<input type="checkbox"/> Post Finished Anodize
_____ Spill Outs		<input type="checkbox"/> _____	<input type="checkbox"/> MBED-B650	<input type="checkbox"/> _____
			<input type="checkbox"/> MBED-B800	

COLOR \_\_\_\_\_



0.063 prefinished Kynar® is only available in Statuary Bronze, Medium Bronze, Sandstone, Dove Gray, Ascot White, Forest Green & Bone White

<u>APPROVALS</u> (Contact manufacturer for verification of test report data on your project)  		<u>CUSTOMER APPROVAL</u> <input type="checkbox"/> Approved for Fabrication <input type="checkbox"/> Approved with Changes <input type="checkbox"/> Disapproved, Resubmit  _____ Authorized Customer Signature  _____ Title _____ Date _____	
Job Name:	Customer:	By:	
Job #:	Representative:	Date:	
Location:	Architect:	Sheet of	


# Ply MB Standard

Fascia Model	Face Height	Minimum Fascia Gauge	Maximum Nailer Coverage	Cleat Gauge
MBED-B350	3 1/2"	0.040	2 9/16"	24GA
MBED-B500	5"	0.040	4 1/16"	24GA
MBED-B650	6 1/2"	0.040	5 9/16"	24GA
MBED-B800	8"	0.050	7 1/16"	22GA


Intermediate formed fascia sizes may be specified within the allowable range of 2-5/8" to 13".

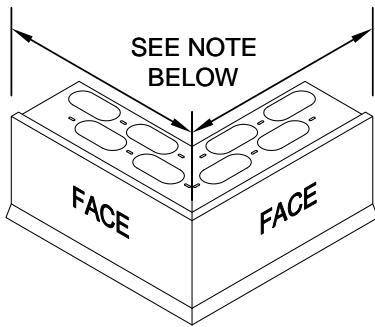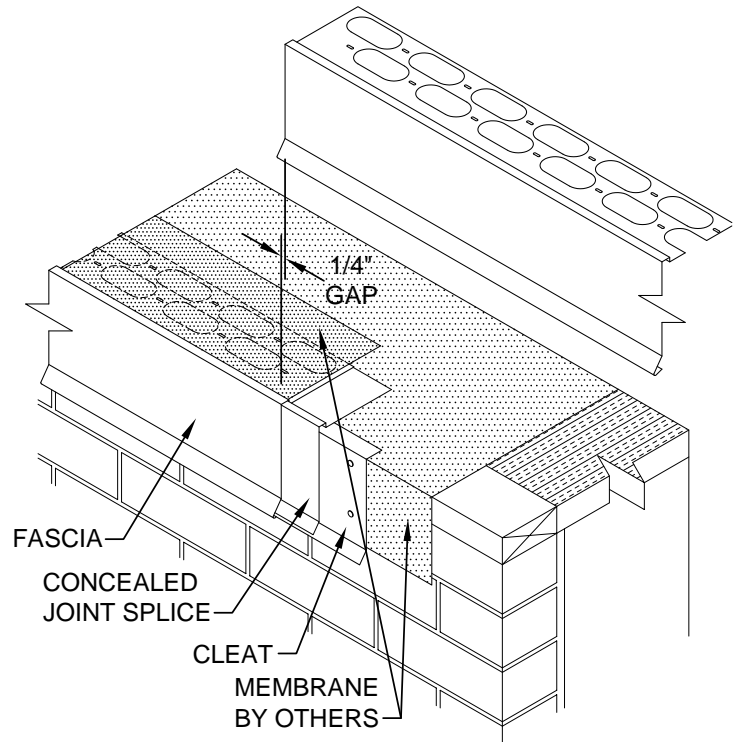


**OUTSIDE MITER**

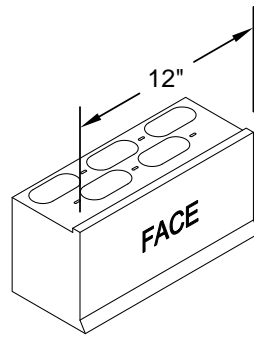


**END CAP**  
LEFT HAND SHOWN

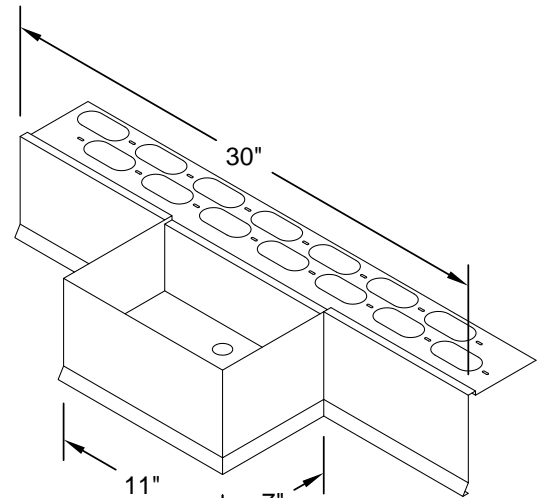


**SUMP**  
2 PIECE ASSEMBLY

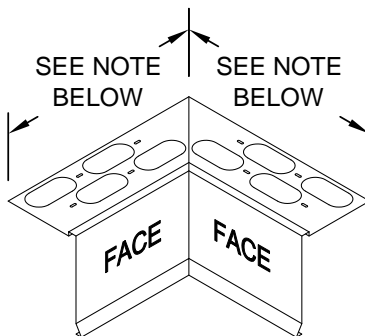

**INSIDE MITER**

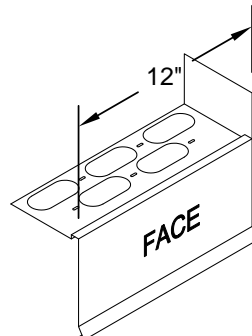

**END TERM**  
RIGHT HAND SHOWN

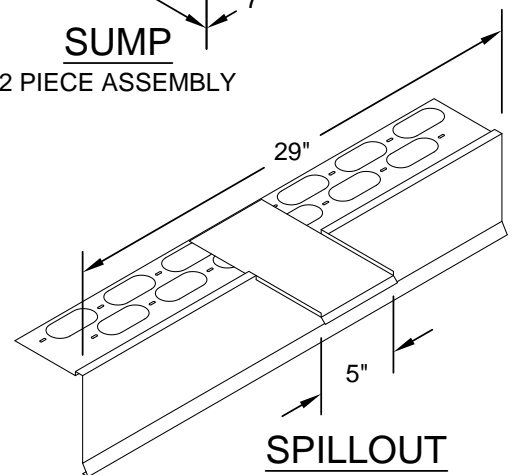

**SPILLOUT**  
2 PIECE ASSEMBLY

Standard fascia miter leg lengths: 12 1/2" nominal

Standard fascia miter angle is 90°

For special miter requirements, attach sketches or consult manufacturer for assistance.