



PLYFAST® 1.7 BASE PLY FASTENER

Description: PLYFAST® 1.7 Base Ply Fasteners are precision formed from corrosion resistant Galvanized (G-90) steel and protected with a special elastomeric polymer coating to prevent corrosion. Legs: Rectangular dual gripping legs, 1.7" long. Disk: Integrally locked to fastener. Precision formed from corrosion resistant Galvalume (AZ-55) steel to prevent corrosion. Rib reinforced cap, 2.7" diameter. PlyFast 1.7 Base Ply Fastener is also Factory Mutual approved.

Use: Designed to attach base sheets to lightweight insulating concrete and various poured gypsum roof decks. Note: Not intended to attach insulation or penetrate through insulation to roof decks.

Corrosion Coating: Corrosion resistant coating exhibits less than 15% red rust which meets or exceeds FM 4470 corrosion standards and withstands 30 cycles of the Kesternich DIN 50018 SFW 2.0 test.


Application: Always use PlyFast® Magnetic Drivers or other compatible magnetic driver to install the fasteners. Consult manufacturer for the specific driver for your application. **Method:** Drive PlyFast® 1.7 Base Ply Fasteners as an ordinary nail. DO NOT TOE. Seat cap flush with roofing surface (see illustration). **Operation:** As PlyFast® 1.7 Base Ply Fasteners is driven, dual legs diverge and cut a plug of deck material which wedges and anchors the fastener in its own hole. No pre-drilling is required.

Tools: For best installation result, use PlyFast® Magnetic Drivers or other compatible magnetic driver. See PlyFast® Fastener Information Guide for specific details.

Approvals: PlyFast® 1.7 Base Ply Fastener is listed or approved with Factory Mutual (FM). Contact U.S. Ply, Inc. for specific/applicable codes.


Fastening Pattern: Consult U.S. Ply Technical Department and/or Factory Mutual requirements for recommended patterns in normal, exposed, and high wind velocity areas.

Product Data: PLYFAST® 1.7 Base Ply Fastener (typical)

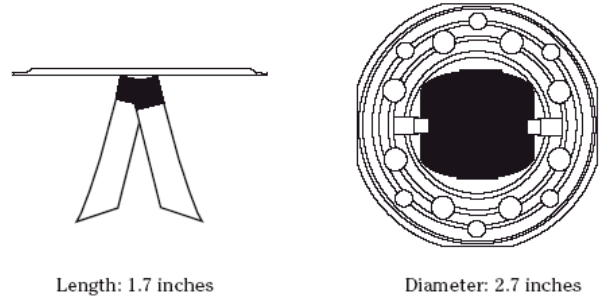

Length: 1.7 inches

Diameter: 2.7 inches

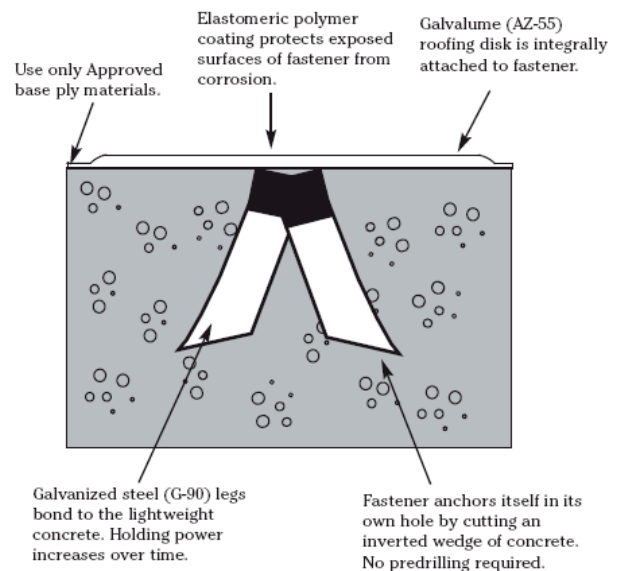

CORPORATE HEADQUARTERS: P.O. BOX 11740, FORT WORTH, TEXAS 76110

TOLL-FREE: 866-PUSH-PLY (866) 787-4759
LOCAL: (817) 413-0103 • FAX: (817) 413-8221
WWW.USPLY.COM

Product Data: PLYFAST® Ordering Information (typical):

Product	Screw Length*	Pieces/Box	Weight/Box
1.7 Base Ply Fastener-E	1.7"	1000	40 lbs

All values given are approximate and are subject to change without notice. There is no implied or express warranty given through these values or statements, nor are there any assertions that the product purchased has been individually tested to conform to these standards. Testing is performed on a random basis by "in-house" and independent "third party" evaluation for the purpose of classification and or approval. Acceptance, purchase and selection of these products are the sole responsibility of the buyer or buyer's representative. We assume no responsibility for coverage, performance or injuries resulting from use. Liability, if any, is limited to replacement of the product. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY U.S. PLY, INC. EXPRESSED OR IMPLIED; STATUTORY, BY OPERATION OF LAW, OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.



Face of Driver