




U.S. Ply Traditional Gravel Guard

ORDER / SPECIFICATION FORM
(For Built-Up and Modified Roofing)

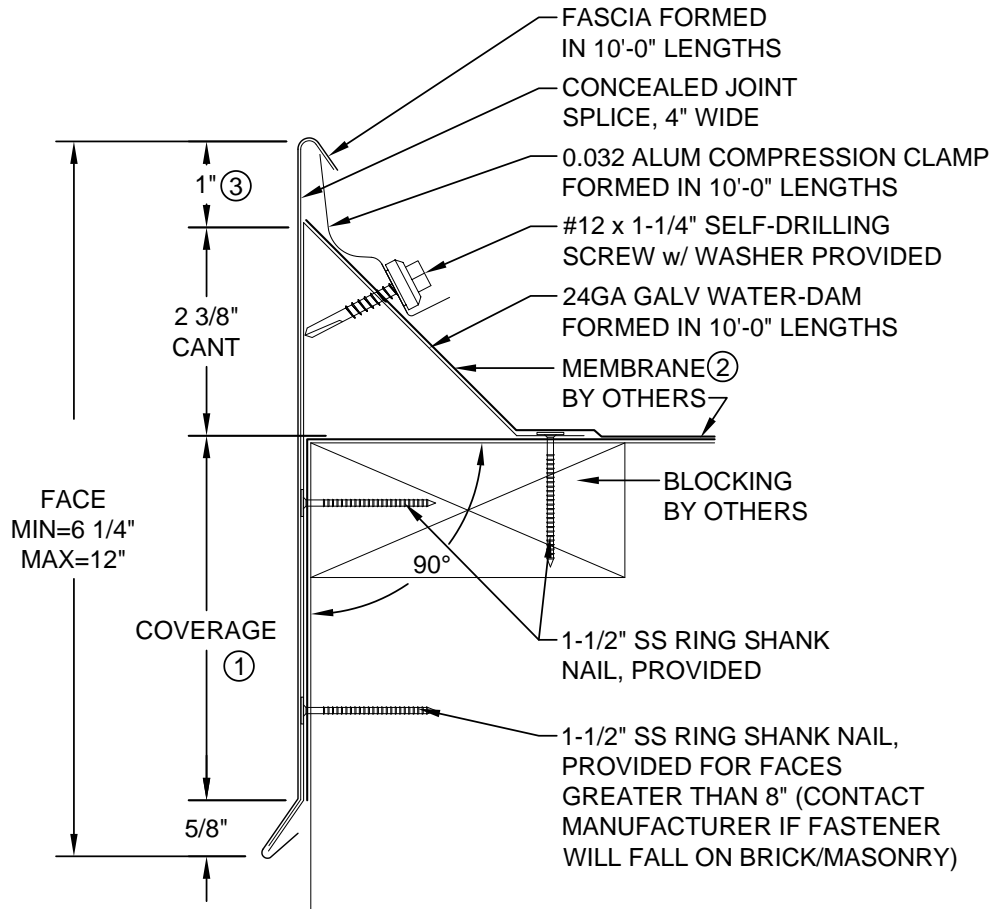

- ① Face = Coverage (should extend a min. of 1" below water resistant wall surface) + 4".
- ② Coordinate installation with membrane manufacturer.
- ③ The dimension shown will vary depending upon the number of roofing plys used.

QUANTITY

- _____ Total LF (10'-0" pcs)
- _____ Miters (___ Outside, ___ Inside)
- _____ End Caps (___ Left, ___ Right)
- _____ End Terms (___ Left, ___ Right)
- _____ Radius LF (10'-0" pcs)
- _____ Ridge/Valley Miters
- _____ Compound Miters
- _____ Special Corners _____
- _____ Sumps
- _____ Spill Outs

(Attach Sketches)

MATERIAL

- Aluminum
- Galvanized
- Stainless Steel
- _____

THICKNESS

- 0.050
- 0.063
- 0.080
- 24GA
- 22GA
- _____

ACCESSORY TYPE

- Welded
- Folded

FINISH

- Mill Finish
- Prefinished Kynar
- Post Finished Kynar
- Prefinished Anodize
- Post Finished Anodize
- _____

COLOR

0.063 prefinished Kynar® is only available in Statuary Bronze, Medium Bronze, Sandstone, Dove Gray, Ascot White, Forest Green & Bone White

APPROVALS

(Contact manufacturer for verification of test report data on your project)

ANSI/SPRI
ES-1 TESTED



R25074

CUSTOMER APPROVAL

- Approved for Fabrication
- Approved with Changes
- Disapproved, Resubmit

Authorized Customer Signature

Title

Date

Job Name:

Customer:

By:

Job #:

Representative:

Date:

Location:

Architect:

Sheet of



2000 E. Richmond Ave - Fort Worth, TX - Phone: (877) 628-7759 / (817) 413-0103 - Fax: (817) 413-8221

www.usply.com


U.S. Ply Traditional Gravel Guard

Fascia Model	Face Height	Minimum Fascia Gauge	Maximum Nailer Coverage	Water Dam Gauge
F-625	6 1/4"	0.050	2 1/4"	24GA
F-775	7 3/4"	0.050	3 3/4"	22GA
F-825	8 1/4"	0.050	4 1/4"	20GA
F-1075	10 3/4"	0.050	6 3/4"	20GA
F-1225	12 1/4"	0.050	8 1/4"	20GA


Intermediate formed fascia sizes may be specified within the allowable range of 6-1/4" to 12".

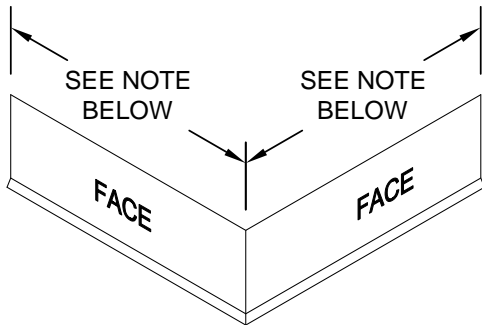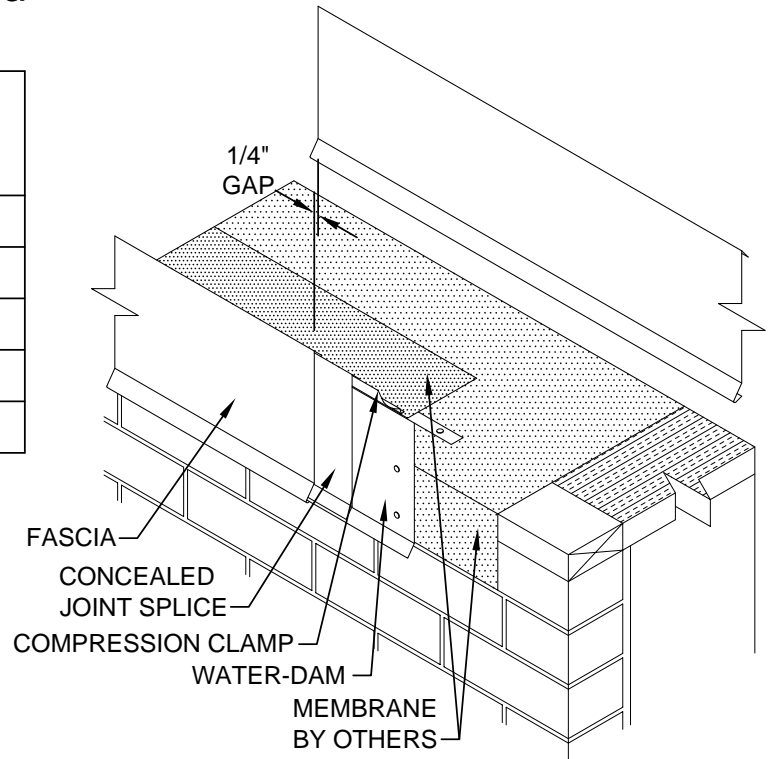


OUTSIDE MITER




END CAP
LEFT HAND SHOWN

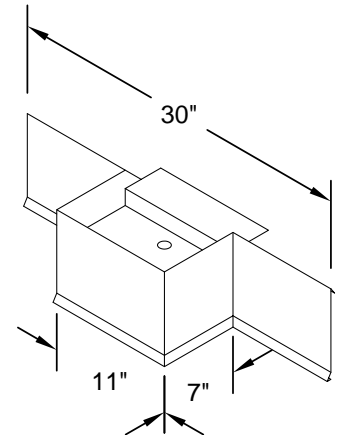


SUMP
2 PIECE ASSEMBLY

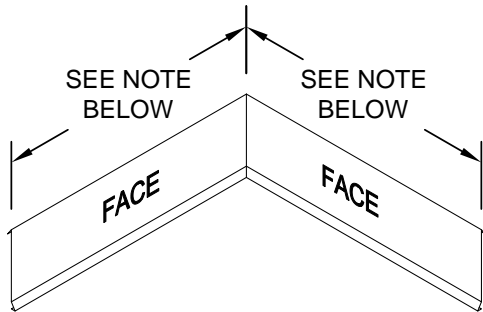

INSIDE MITER



END TERM
RIGHT HAND SHOWN

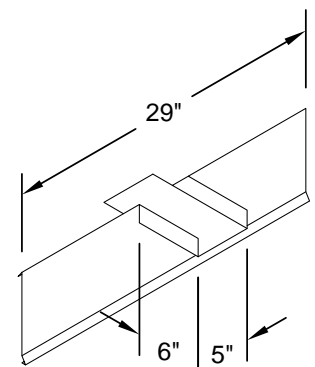

SPILLOUT
2 PIECE ASSEMBLY

Standard fascia miter leg lengths: 24" nominal

Standard fascia miter angle is 90°

For special miter requirements, attach sketches or consult manufacturer for assistance.