




# Ply MB Gravel Stop

ORDER / SPECIFICATION FORM

(For Built Up or Modified Roofs)

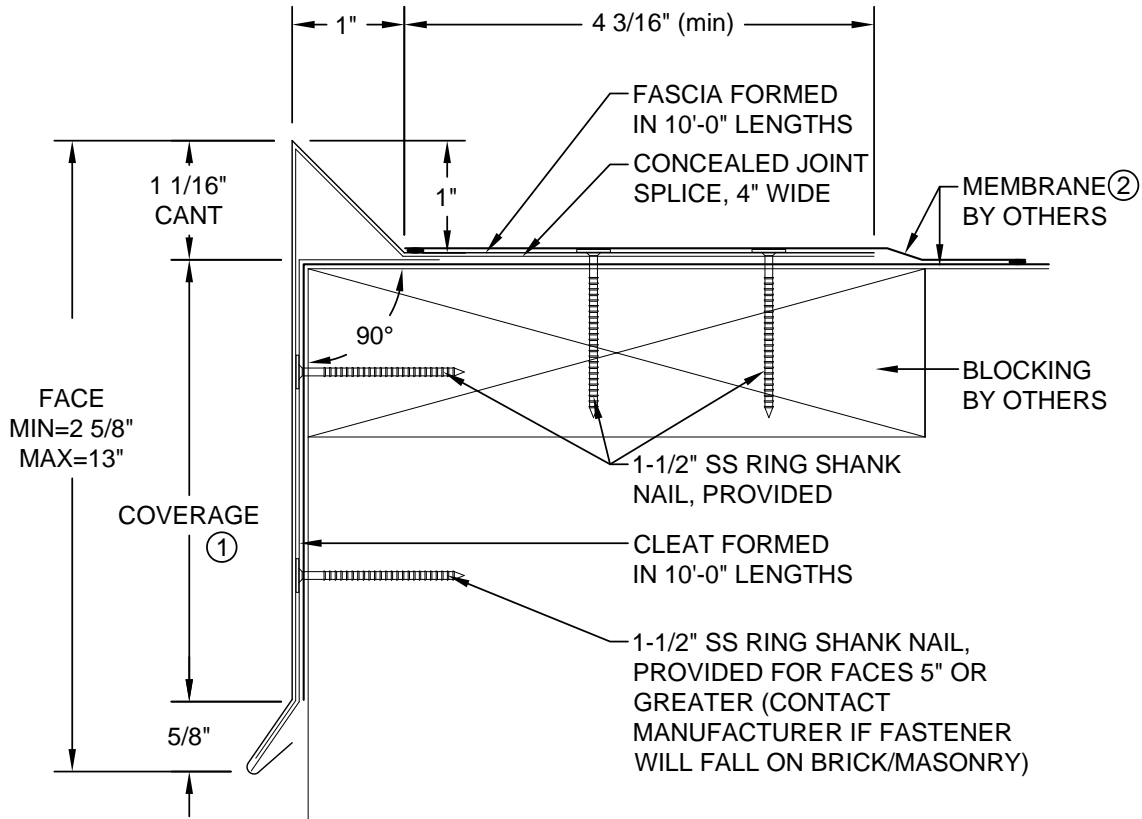



- ① Face = Coverage (should extend a min. of 1" below water resistant wall surface)+1 11/16".
- ② Coordinate installation with membrane manufacturer.

QUANTITY	MATERIAL	THICKNESS	ACCESSORY TYPE	FINISH
_____ Total LF (10'-0" pcs)	<input type="checkbox"/> Aluminum	<input type="checkbox"/> 0.040	<input type="checkbox"/> Welded	<input type="checkbox"/> Mill Finish
_____ Miters (___ Outside, ___ Inside)	<input type="checkbox"/> Galvanized	<input type="checkbox"/> 0.050	<input type="checkbox"/> Folded	<input type="checkbox"/> Prefinished Kynar
_____ End Caps (___ Left, ___ Right)	<input type="checkbox"/> Stainless Steel	<input type="checkbox"/> 0.063	<u>MODEL</u>	<input type="checkbox"/> Post Finished Kynar
_____ End Terms (___ Left, ___ Right)	<input type="checkbox"/> _____	<input type="checkbox"/> 24GA	<input type="checkbox"/> MBED-G400	<input type="checkbox"/> Prefinished Anodize
_____ Sumps		<input type="checkbox"/> 22GA	<input type="checkbox"/> MBED-G550	<input type="checkbox"/> Post Finished Anodize
_____ Spill Outs		<input type="checkbox"/> _____	<input type="checkbox"/> MBED-G700	<input type="checkbox"/> _____

COLOR

0.063 prefinished Kynar® is only available in Statuary Bronze, Medium Bronze, Sandstone, Dove Gray, Ascot White, Forest Green & Bone White

<u>APPROVALS</u> (Contact manufacturer for verification of test report data on your project)		<u>CUSTOMER APPROVAL</u>	
 		<input type="checkbox"/> Approved for Fabrication <input type="checkbox"/> Approved with Changes <input type="checkbox"/> Disapproved, Resubmit	
		_____ Authorized Customer Signature	
		_____ Title	
_____ Date			
Job Name:	Customer:	By:	
Job #:	Representative:	Date:	
Location:	Architect:	Sheet of	



2000 E. Richmond Ave - Fort Worth, TX - Phone: (877) 628-7759 / (817) 413-0103 - Fax: (817) 413-8221

www.usply.com


# Ply MB Gravel Stop

Fascia Model	Face Height	Minimum Fascia Gauge	Maximum Nailer Coverage	Cleat Gauge
MBED-G400	4"	0.040	2 5/16"	24GA
MBED-G550	5 1/2"	0.040	3 13/16"	24GA
MBED-G700	7"	0.040	5 5/16"	24GA


Intermediate formed fascia sizes may be specified within the allowable range of 2-5/8" to 13".

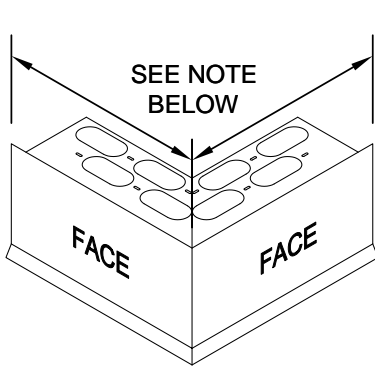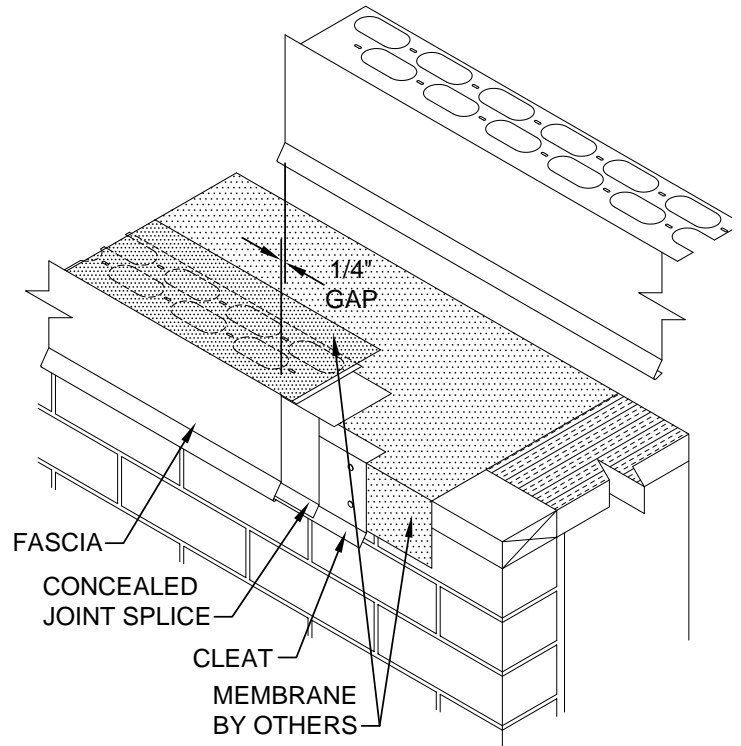


OUTSIDE MITER




END CAP  
LEFT HAND SHOWN

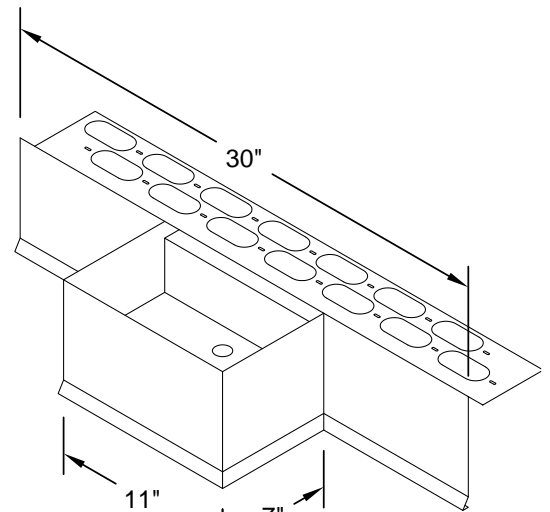


SUMP  
2 PIECE ASSEMBLY

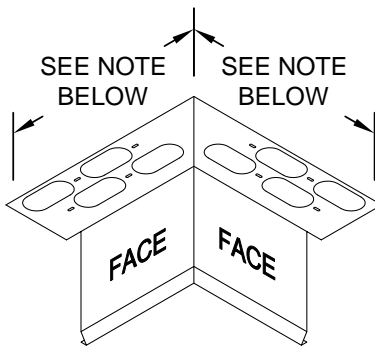

INSIDE MITER

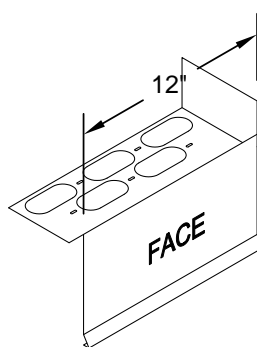

END TERM  
RIGHT HAND SHOWN

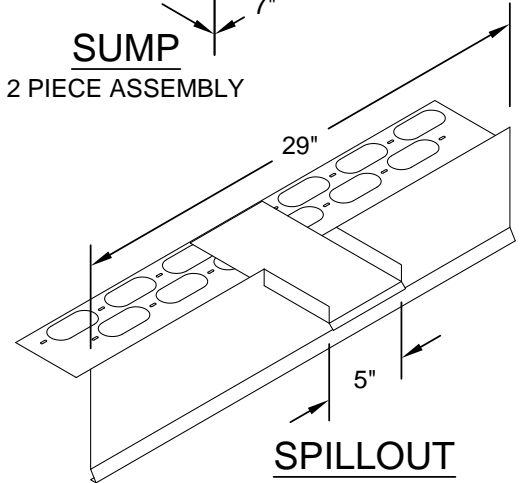

SPILLOUT  
2 PIECE ASSEMBLY

Standard fascia miter leg lengths: 12 1/2" nominal

Standard fascia miter angle is 90°

For special miter requirements, attach sketches or consult manufacturer for assistance.