




Ply Guard Gravel Stop

ORDER / SPECIFICATION FORM
(For Built-Up and Modified Roofing)

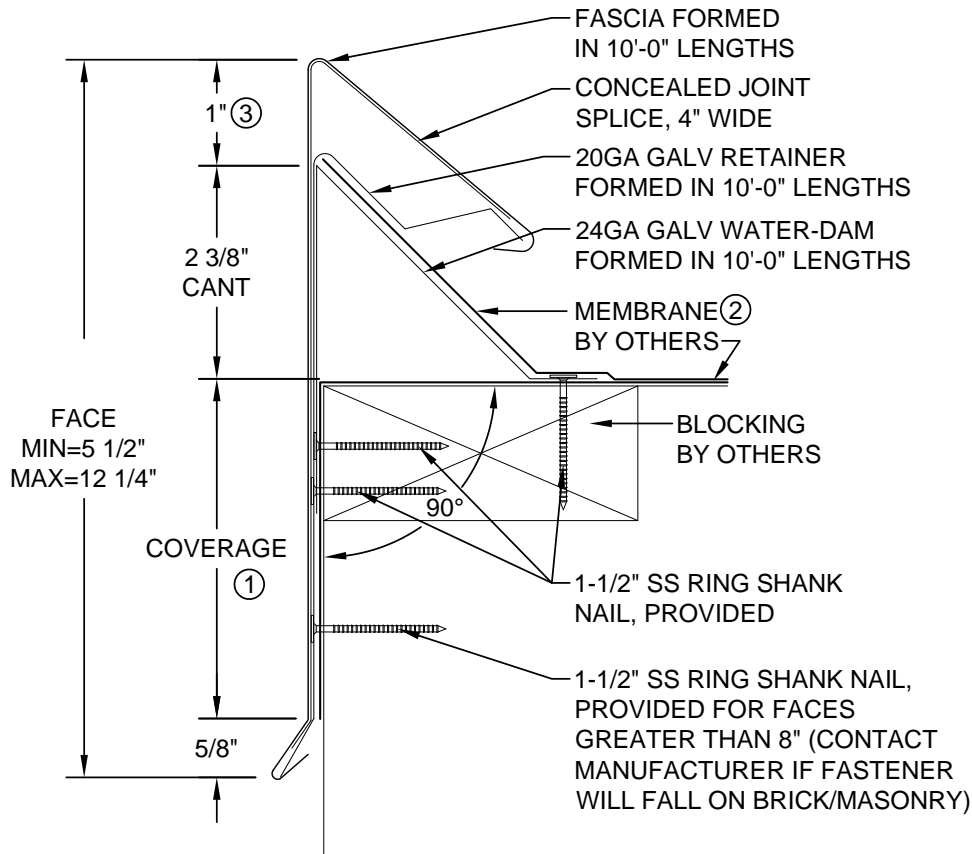

QUANTITY		① Face = Coverage (should extend a min. of 1" below water resistant wall surface)+ 4".	
_____ Total LF (10'-0" pcs)		② Coordinate installation with membrane manufacturer.	
_____ Miters (___ Outside, ___ Inside)		③ The dimension shown will vary depending upon the number of roofing plys used.	
_____ End Caps (___ Left, ___ Right)		MATERIAL	THICKNESS
_____ End Terms (___ Left, ___ Right)		<input type="checkbox"/> Aluminum	<input type="checkbox"/> 0.050
_____ Radius LF (10'-0" pcs)		<input type="checkbox"/> Galvanized	<input type="checkbox"/> 0.063
_____ Ridge/Valley Miters		<input type="checkbox"/> Stainless Steel	<input type="checkbox"/> 0.080
_____ Compound Miters		<input type="checkbox"/> _____	<input type="checkbox"/> 24GA
_____ Special Corners _____			<input type="checkbox"/> 22GA
_____ Sumps			<input type="checkbox"/> _____
_____ Spill Outs			
		ACCESSORY TYPE	FINISH
		<input type="checkbox"/> Welded	<input type="checkbox"/> Mill Finish
		<input type="checkbox"/> Folded	<input type="checkbox"/> Prefinished Kynar
			<input type="checkbox"/> Post Finished Kynar
			<input type="checkbox"/> Prefinished Anodize
			<input type="checkbox"/> Post Finished Anodize
			<input type="checkbox"/> _____
		COLOR	



0.063 prefinished Kynar® is only available in Statuary Bronze, Medium Bronze, Sandstone, Dove Gray, Ascot White, Forest Green & Bone White

APPROVALS (Contact manufacturer for verification of test report data on your project)		CUSTOMER APPROVAL	
		<input type="checkbox"/> Approved for Fabrication <input type="checkbox"/> Approved with Changes <input type="checkbox"/> Disapproved, Resubmit	
		_____ Authorized Customer Signature	
Job Name:		Title _____ Date _____	
Job #:		Customer: _____ By: _____	
Location:		Representative: _____ Date: _____	
		Architect: _____ Sheet _____ of _____	


Ply Guard Gravel Stop

Fascia Model	Face Height	Minimum Fascia Gauge	Maximum Nailer Coverage	Water Dam Gauge
NPF-625	6 1/4"	0.050	2 1/4"	24GA
NPF-775	7 3/4"	0.050	3 3/4"	22GA
NPF-825	8 1/4"	0.050	4 1/4"	20GA
NPF-1075	10 3/4"	0.050	6 3/4"	20GA


Intermediate formed fascia sizes may be specified within the allowable range of 5-1/2" to 12-1/4".

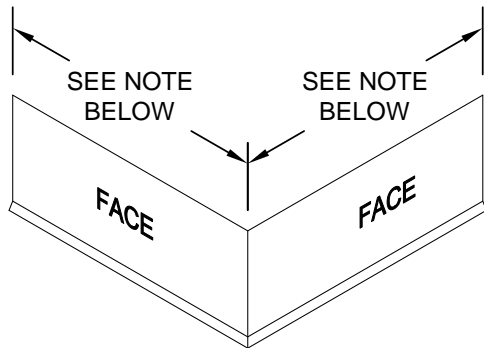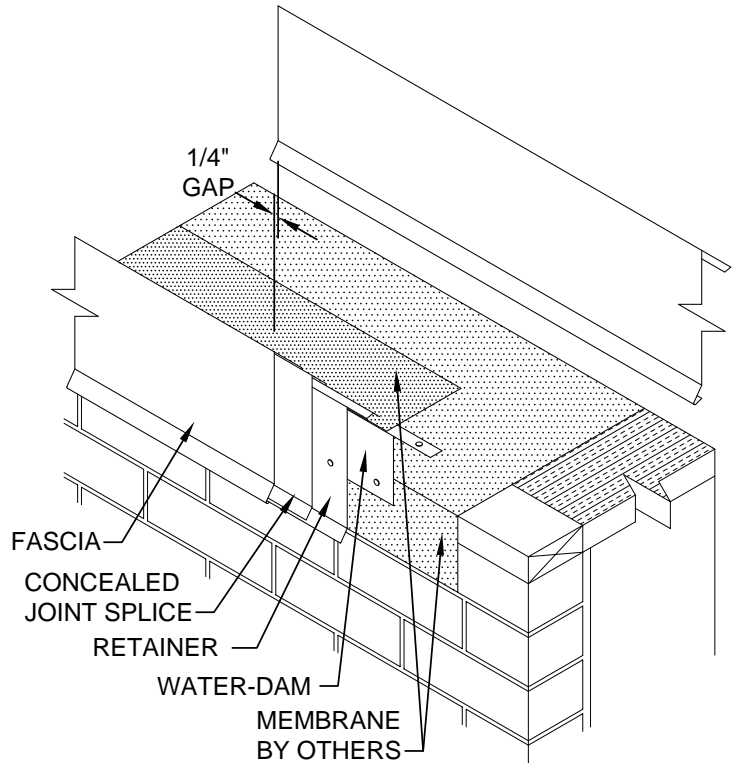


OUTSIDE MITER




END CAP
LEFT HAND SHOWN

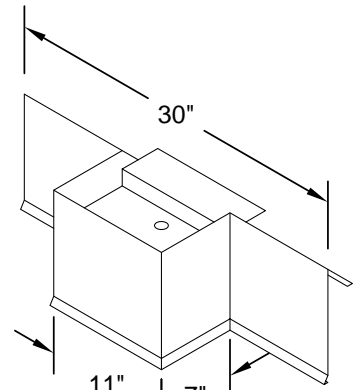


SUMP
2 PIECE ASSEMBLY

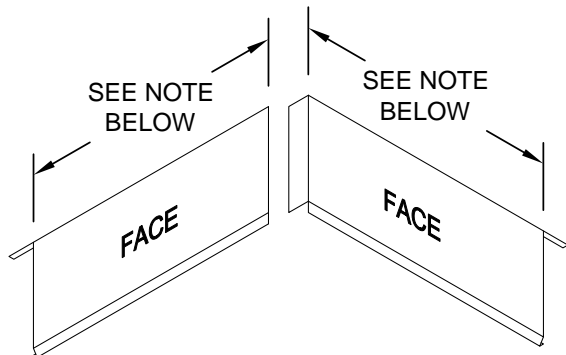

INSIDE MITER



END TERM
RIGHT HAND SHOWN

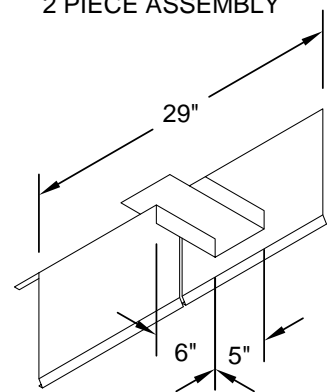

SPILLOUT
3 PIECE ASSEMBLY

Standard fascia miter leg lengths: 24" nominal

Standard fascia miter angle is 90°

For special miter requirements, attach sketches or consult manufacturer for assistance.