




Ply Snap Standard Coping

ORDER / SPECIFICATION FORM

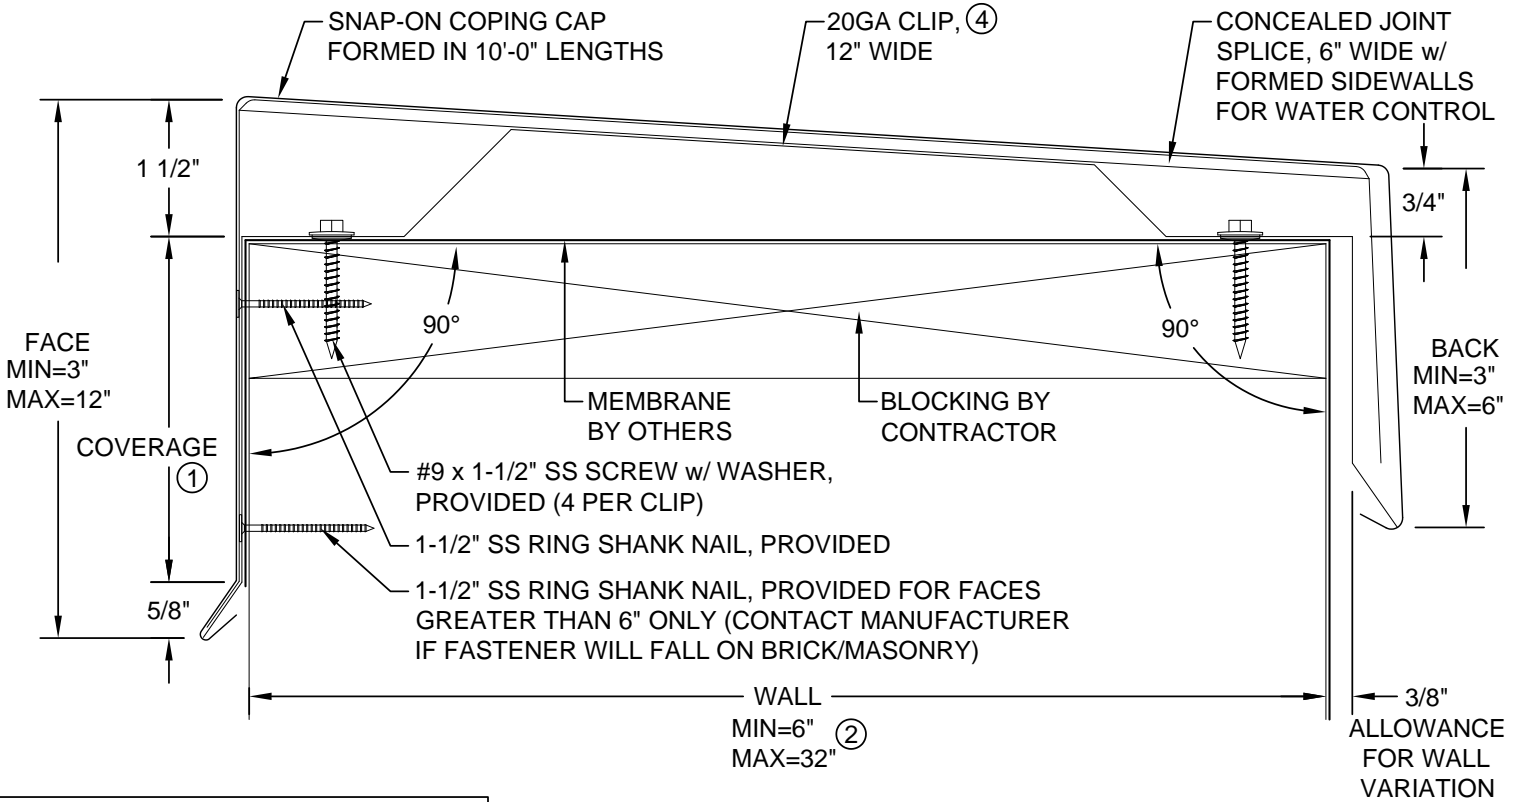

QUANTITY

_____ Total LF (10'-0" pcs)

_____ Miters (___ Outside, ___ Inside)

_____ End Caps (___ Left, ___ Right)

_____ End Terms (___ Left, ___ Right)

_____ Radius LF (5'-0" pcs)

_____ Radius to Straight Miters

_____ Vaulted LF (5'-0" pcs)

_____ Vaulted to Straight Miters

_____ Tee Miters

_____ Zee Miters

_____ Transition Miters, (Attach Sketches)

_____ Ridge Miters,

_____ Valley Miters,



_____ Special Corners

- ① Face = coverage (should extend a min of 1" below water resistant wall surface)+2 1/8".
- ② Contact manufacturer for coping design on walls outside these parameters.
- ③ 0.040 ALUM & 24GA GALV coping cap only available for wall sizes 6" to 24".
- ④ Clip spacing; walls 6" up to 17" = 60"OC, walls 17" to 32" = 40"OC. Clip has a different profile on walls 20" to 32" (See profile on back page).


MATERIAL	THICKNESS	ACCESSORY TYPE	FINISH
<input type="checkbox"/> Aluminum	<input type="checkbox"/> 0.040 ③	<input type="checkbox"/> Welded	<input type="checkbox"/> Mill Finish
<input type="checkbox"/> Galvanized	<input type="checkbox"/> 0.050	<input type="checkbox"/> Metal-Lok	<input type="checkbox"/> Prefinished Kynar
<input type="checkbox"/> Stainless Steel	<input type="checkbox"/> 0.063		<input type="checkbox"/> Post Finished Kynar
<input type="checkbox"/> _____	<input type="checkbox"/> 0.080		<input type="checkbox"/> Prefinished Anodize
	<input type="checkbox"/> 0.125		<input type="checkbox"/> Post Finished Anodize
	<input type="checkbox"/> 24GA ③		<input type="checkbox"/> _____
	<input type="checkbox"/> 22GA		
	<input type="checkbox"/> _____		

COLOR _____



0.063 prefinished Kynar® is only available in Statuary Bronze, Medium Bronze, Sandstone, Dove Gray, Ascot White, Forest Green & Bone White

APPROVALS (Contact manufacturer for verification of test report data on your project)		CUSTOMER APPROVAL	
 		<input type="checkbox"/> Approved for Fabrication <input type="checkbox"/> Approved with Changes <input type="checkbox"/> Disapproved, Resubmit	
		_____ Authorized Customer Signature	
		_____ Title	
Job Name: _____		Customer: _____	By: _____
Job #: _____		Representative: _____	Date: _____
Location: _____		Architect: _____	Sheet of _____


Ply Snap Standard Coping




CLIP PROFILE FOR WALLS 20" TO 32"

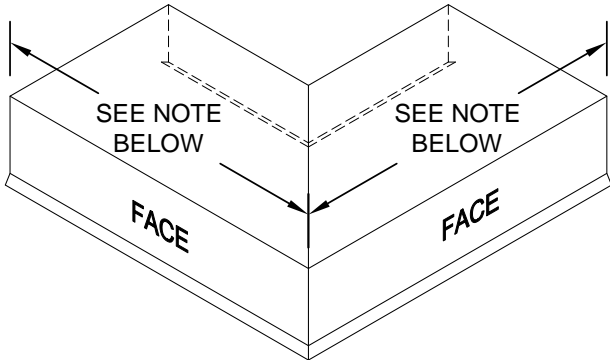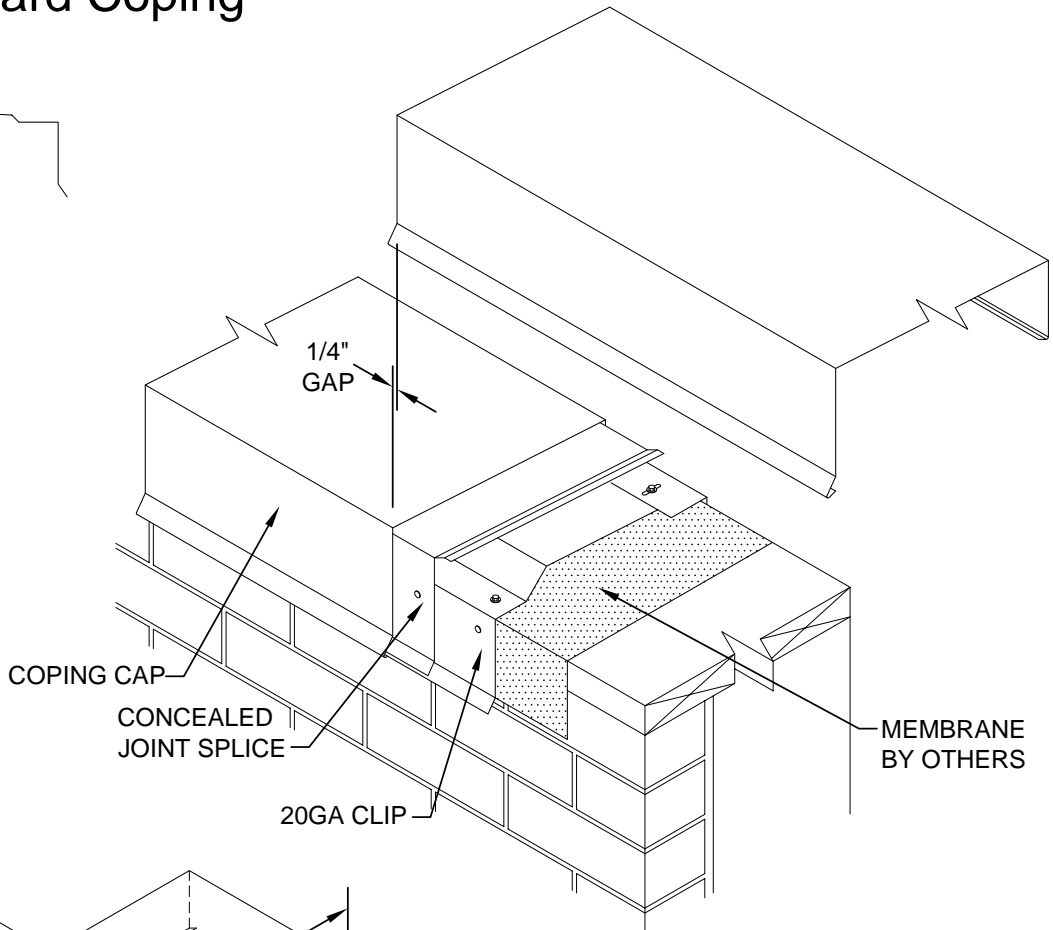


OUTSIDE MITER

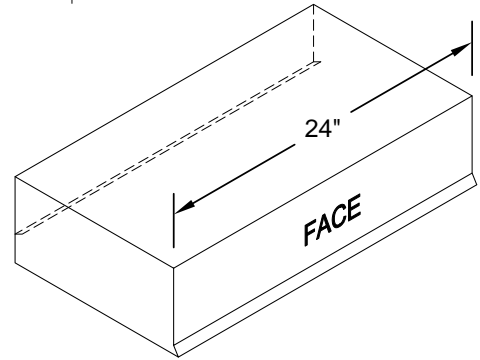

END CAP
LEFT HAND SHOWN

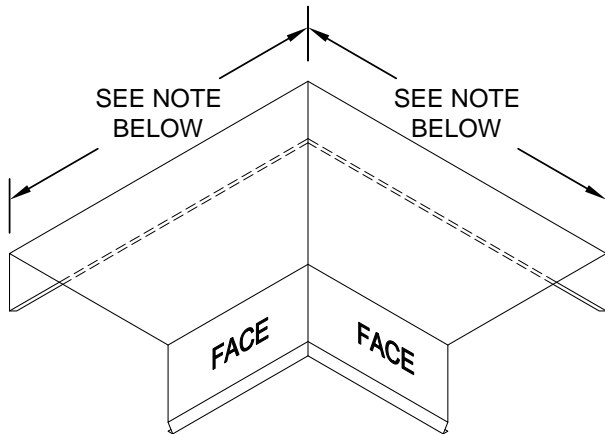

INSIDE MITER

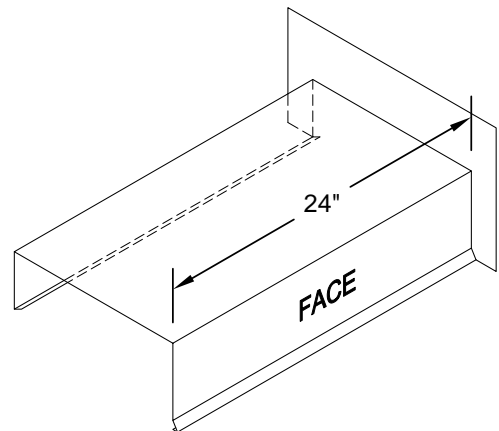

END TERM
RIGHT HAND SHOWN

Standard coping miter leg lengths:

23 1/4" for 6" to 16" wall widths

29 1/4" 16" to 23" wall widths

custom lengths for wall widths > 23"

Standard coping miter angle is 90°

For special miter requirements, attach sketches or consult manufacturer for assistance.